**CABLE STRUCTURE**

**Conductor** : Non-compacted and compacted round annealed copper  
: Multi-core : Sizes 1.5 mm<sup>2</sup> up to 400 mm<sup>2</sup>

**Insulation** : Cross-Linked polyethylene (XLPE)

**Core identification** : 2 Cores: Blue, Brown

**Inner Sheath**: Black polyvinyl chloride (PVC)

**Armour** : Two galvanized flat steel tape

**Sheath** : Black flame retardant polyvinyl chloride (PVC/ST2)

**TECHNICAL DATA**

**Classification** : Maximum conductor temperature 90°C  
: Circuit voltage not exceeding 1,200 Volts

**Rated voltage** : 600 Volts between Line to Earth  
: 1,000 Volts between Line to Line

**Testing volt** : 3,500 Volts

**Reference standard** : IEC 60502-1, IEC 60228, IEC 60332-1  
: IEC 60332-3-24 ( Cat.C )

**APPLICATION**

For installation exposed, or in raceway, wet or dry location, or direct burial in ground

| Number of cores | Nominal cross sectional area | Conductor type | Insulation thickness nominal | Inner Sheath thickness approx. | Dia. Of inner sheath approx. | Armor thickness nominal | Sheath thickness nominal | Overall diameter approx. | Conductor resistance at 20°C maximum | Insulation resistance at 20°C minimum | Continuous current rating in free air at 40°C maximum | Continuous current rating in ground at 30°C maximum | Cable weight approx. | Standard Length |
|-----------------|------------------------------|----------------|------------------------------|--------------------------------|------------------------------|-------------------------|--------------------------|--------------------------|--------------------------------------|---------------------------------------|-------------------------------------------------------|-----------------------------------------------------|----------------------|-----------------|
|                 | (mm <sup>2</sup> )           |                | (mm)                         | (mm)                           | (mm)                         | (mm)                    | (mm)                     | (mm)                     | (Ω/km)                               | (MΩ·km)                               | (A)                                                   | (A)                                                 | (kg/km)              | (m)             |
| 2               | 1.5                          | Non-Compacted  | 0.7                          | 1.2                            | 9.70                         | 0.2                     | 1.8                      | 15.0                     | 12.1                                 | 2,500                                 | 28                                                    | 33                                                  | 330                  | 500/D           |
|                 | 2.5                          | Non-Compacted  | 0.7                          | 1.2                            | 10.5                         | 0.2                     | 1.8                      | 16.0                     | 7.41                                 | 2,100                                 | 37                                                    | 43                                                  | 380                  | 500/D           |
|                 | 4                            | Non-Compacted  | 0.7                          | 1.2                            | 11.5                         | 0.2                     | 1.8                      | 17.0                     | 4.61                                 | 1,700                                 | 48                                                    | 56                                                  | 440                  | 500/D           |
|                 | 6                            | Non-Compacted  | 0.7                          | 1.2                            | 12.5                         | 0.2                     | 1.8                      | 18.0                     | 3.08                                 | 1,450                                 | 61                                                    | 70                                                  | 500                  | 500/D           |
|                 | 10                           | Compacted      | 0.7                          | 1.2                            | 13.5                         | 0.2                     | 1.8                      | 19.0                     | 1.83                                 | 1,250                                 | 82                                                    | 92                                                  | 600                  | 500/D           |
|                 | 16                           | Compacted      | 0.7                          | 1.2                            | 16.0                         | 0.2                     | 1.8                      | 21                       | 1.150                                | 1,000                                 | 108                                                   | 120                                                 | 800                  | 500/D           |
|                 | 25                           | Compacted      | 0.9                          | 1.2                            | 19.0                         | 0.2                     | 1.8                      | 24                       | 0.727                                | 1,050                                 | 144                                                   | 154                                                 | 1100                 | 500/D           |
|                 | 35                           | Compacted      | 0.9                          | 1.2                            | 21                           | 0.2                     | 1.8                      | 26                       | 0.524                                | 900                                   | 176                                                   | 185                                                 | 1300                 | 500/D           |
|                 | 50                           | Compacted      | 1.0                          | 1.2                            | 24                           | 0.2                     | 1.9                      | 30                       | 0.387                                | 850                                   | 213                                                   | 219                                                 | 1700                 | 500/D           |
|                 | 70                           | Compacted      | 1.1                          | 1.2                            | 28                           | 0.2                     | 2.0                      | 33                       | 0.268                                | 800                                   | 267                                                   | 268                                                 | 2200                 | 500/D           |
|                 | 95                           | Compacted      | 1.1                          | 1.2                            | 31                           | 0.5                     | 2.2                      | 38                       | 0.193                                | 650                                   | 331                                                   | 322                                                 | 3100                 | 500/D           |
|                 | 120                          | Compacted      | 1.2                          | 1.2                            | 35                           | 0.5                     | 2.3                      | 42                       | 0.153                                | 650                                   | 383                                                   | 366                                                 | 3800                 | 500/D           |
|                 | 150                          | Compacted      | 1.4                          | 1.3                            | 39                           | 0.5                     | 2.4                      | 46                       | 0.124                                | 700                                   | 435                                                   | 409                                                 | 4500                 | 500/D           |
|                 | 185                          | Compacted      | 1.6                          | 1.3                            | 43                           | 0.5                     | 2.6                      | 51                       | 0.0991                               | 700                                   | 500                                                   | 461                                                 | 5400                 | 500/D           |
|                 | 240                          | Compacted      | 1.7                          | 1.4                            | 49                           | 0.5                     | 2.8                      | 57                       | 0.0754                               | 650                                   | 590                                                   | 531                                                 | 6900                 | 500/D           |
|                 | 300                          | Compacted      | 1.8                          | 1.5                            | 54                           | 0.5                     | 2.9                      | 62                       | 0.0601                               | 600                                   | 676                                                   | 596                                                 | 8300                 | 500/D           |
|                 | 400                          | Compacted      | 2.0                          | 1.7                            | 61                           | 0.5                     | 3.2                      | 70                       | 0.0470                               | 600                                   | 765                                                   | 664                                                 | 10500                | 500/D           |


**Remark** : Thermal resistivity of soil 1.2 K.m/W or °C.m/W

D : Packing in drum

Deep of laying (For cable laid direct in ground) 0.8 m

| Number of cores | Nominal cross sectional area | A.C. Resistance | Inductance | Reactance | Impedance |
|-----------------|------------------------------|-----------------|------------|-----------|-----------|
|                 | (mm <sup>2</sup> )           | R (Ω/km)        | L (mH/km)  | XL (Ω/km) | Z (Ω/km)  |
| 2               | 1.5                          | 15.4287         | 0.3427     | 0.1077    | 15.4291   |
|                 | 2.5                          | 9.4485          | 0.3249     | 0.1021    | 9.4491    |
|                 | 4                            | 5.8782          | 0.3026     | 0.0951    | 5.8790    |
|                 | 6                            | 3.9273          | 0.2890     | 0.0908    | 3.9284    |
|                 | 10                           | 2.3335          | 0.2747     | 0.0863    | 2.3351    |
|                 | 16                           | 1.4665          | 0.2614     | 0.0821    | 1.4688    |
|                 | 25                           | 0.9272          | 0.2637     | 0.0829    | 0.9309    |
|                 | 35                           | 0.6684          | 0.2567     | 0.0807    | 0.6733    |
|                 | 50                           | 0.4938          | 0.2435     | 0.0765    | 0.4997    |
|                 | 70                           | 0.3423          | 0.2395     | 0.0752    | 0.3504    |
|                 | 95                           | 0.2468          | 0.2331     | 0.0732    | 0.2575    |
|                 | 120                          | 0.1960          | 0.2289     | 0.0719    | 0.2088    |
|                 | 150                          | 0.1593          | 0.2302     | 0.0723    | 0.1749    |
|                 | 185                          | 0.1278          | 0.2326     | 0.0731    | 0.1472    |
|                 | 240                          | 0.0981          | 0.2281     | 0.0717    | 0.1215    |
|                 | 300                          | 0.0791          | 0.2260     | 0.0710    | 0.1063    |
|                 | 400                          | 0.0630          | 0.2259     | 0.0710    | 0.0949    |

## 0.6/1 kV 90 °C CROSS-LINKED POLYETHYLENE INSULATED PVC SHEATHED STEEL TAPE ARMOUR FLAME RETARDANT POWER CABLE

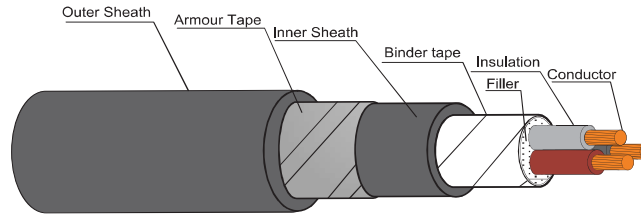

IEC 60502-1



## CABLE STRUCTURE

**Conductor** : Non-compacted and compacted round annealed copper  
: Multi-core : Sizes 1.5 mm<sup>2</sup> up to 400 mm<sup>2</sup>

**Insulation** : Cross-Linked polyethylene (XLPE)

**Core identification** : 3 Cores: Brown, Black, Grey

**Inner Sheath**: Black polyvinyl chloride (PVC)

**Armour** : Two galvanized flat steel tape

**Sheath** : Black flame retardant polyvinyl chloride (PVC/ST2)

## TECHNICAL DATA

**Classification** : Maximum conductor temperature 90°C  
: Circuit voltage not exceeding 1,200 Volts

**Rated voltage** : 600 Volts between Line to Earth  
: 1,000 Volts between Line to Line

**Testing volt** : 3,500 Volts

**Reference standard** : IEC 60502-1, IEC 60228, IEC 60332-1  
: IEC 60332-3-24 ( Cat.C )

## APPLICATION

For installation exposed, or in raceway, wet or dry location, or direct burial in ground

| Number of cores | Nominal cross sectional area | Conductor type | Insulation thickness nominal | Inner Sheath thickness approx. | Dia. Of inner sheath approx. | Armor thickness nominal | Sheath thickness nominal | Overall diameter approx. | Conductor resistance at 20°C maximum | Insulation resistance at 20°C minimum | Continuous current rating in free air at 40°C maximum | Continuous current rating in ground at 30°C maximum | Cable weight approx. | Standard Length |
|-----------------|------------------------------|----------------|------------------------------|--------------------------------|------------------------------|-------------------------|--------------------------|--------------------------|--------------------------------------|---------------------------------------|-------------------------------------------------------|-----------------------------------------------------|----------------------|-----------------|
|                 | (mm <sup>2</sup> )           |                | (mm)                         | (mm)                           | (mm)                         | (mm)                    | (mm)                     | (mm)                     | (Ω/km)                               | (MΩ·km)                               | (A)                                                   | (A)                                                 | (kg/km)              | (m)             |
| 3               | 1.5                          | Non-Compacted  | 0.7                          | 1.2                            | 10.0                         | 0.2                     | 1.8                      | 15.5                     | 12.1                                 | 2,500                                 | 24                                                    | 28                                                  | 370                  | 500/D           |
|                 | 2.5                          | Non-Compacted  | 0.7                          | 1.2                            | 11.0                         | 0.2                     | 1.8                      | 16.5                     | 7.41                                 | 2,100                                 | 31                                                    | 37                                                  | 420                  | 500/D           |
|                 | 4                            | Non-Compacted  | 0.7                          | 1.2                            | 12.0                         | 0.2                     | 1.8                      | 17.5                     | 4.61                                 | 1,700                                 | 41                                                    | 48                                                  | 500                  | 500/D           |
|                 | 6                            | Non-Compacted  | 0.7                          | 1.2                            | 13.5                         | 0.2                     | 1.8                      | 19.0                     | 3.08                                 | 1,450                                 | 52                                                    | 59                                                  | 600                  | 500/D           |
|                 | 10                           | Compacted      | 0.7                          | 1.2                            | 14.5                         | 0.2                     | 1.8                      | 20                       | 1.83                                 | 1,250                                 | 69                                                    | 78                                                  | 700                  | 500/D           |
|                 | 16                           | Compacted      | 0.7                          | 1.2                            | 17.0                         | 0.2                     | 1.8                      | 22                       | 1.150                                | 1,000                                 | 91                                                    | 101                                                 | 1000                 | 500/D           |
|                 | 25                           | Compacted      | 0.9                          | 1.2                            | 20                           | 0.2                     | 1.8                      | 26                       | 0.727                                | 1,050                                 | 122                                                   | 130                                                 | 1300                 | 500/D           |
|                 | 35                           | Compacted      | 0.9                          | 1.2                            | 23                           | 0.2                     | 1.9                      | 28                       | 0.524                                | 900                                   | 149                                                   | 156                                                 | 1700                 | 500/D           |
|                 | 50                           | Compacted      | 1.0                          | 1.2                            | 26                           | 0.2                     | 2.0                      | 31                       | 0.387                                | 850                                   | 181                                                   | 185                                                 | 2200                 | 500/D           |
|                 | 70                           | Compacted      | 1.1                          | 1.2                            | 30                           | 0.2                     | 2.1                      | 36                       | 0.268                                | 800                                   | 227                                                   | 226                                                 | 2900                 | 500/D           |
|                 | 95                           | Compacted      | 1.1                          | 1.2                            | 34                           | 0.5                     | 2.3                      | 41                       | 0.193                                | 650                                   | 281                                                   | 272                                                 | 4000                 | 500/D           |
|                 | 120                          | Compacted      | 1.2                          | 1.2                            | 37                           | 0.5                     | 2.4                      | 45                       | 0.153                                | 650                                   | 325                                                   | 309                                                 | 5000                 | 500/D           |
|                 | 150                          | Compacted      | 1.4                          | 1.3                            | 41                           | 0.5                     | 2.5                      | 49                       | 0.124                                | 700                                   | 370                                                   | 345                                                 | 6000                 | 500/D           |
|                 | 185                          | Compacted      | 1.6                          | 1.4                            | 47                           | 0.5                     | 2.7                      | 55                       | 0.0991                               | 700                                   | 426                                                   | 389                                                 | 7500                 | 500/D           |
|                 | 240                          | Compacted      | 1.7                          | 1.5                            | 53                           | 0.5                     | 2.9                      | 61                       | 0.0754                               | 650                                   | 504                                                   | 449                                                 | 9500                 | 300/D           |
|                 | 300                          | Compacted      | 1.8                          | 1.6                            | 58                           | 0.5                     | 3.1                      | 67                       | 0.0601                               | 600                                   | 576                                                   | 504                                                 | 11500                | 300/D           |
|                 | 400                          | Compacted      | 2.0                          | 1.8                            | 65                           | 0.5                     | 3.4                      | 75                       | 0.0470                               | 600                                   | 662                                                   | 567                                                 | 14500                | 300/D           |



**Remark** : Thermal resistivity of soil 1.2 K.m/W or °C.m/W  
Deep of laying (For cable laid direct in ground) 0.8 m

D : Packing in drum

| Number of cores | Nominal cross sectional area | A.C.Resistance |        | Inductance |         | Reactance |        | Impedance |        |
|-----------------|------------------------------|----------------|--------|------------|---------|-----------|--------|-----------|--------|
|                 |                              | R              | (Ω/km) | L          | (mH/km) | XL        | (Ω/km) | Z         | (Ω/km) |
| 3               | 1.5                          | 15.4287        |        | 0.3427     |         | 0.1077    |        | 15.4291   |        |
|                 | 2.5                          | 9.4485         |        | 0.3249     |         | 0.1021    |        | 9.4491    |        |
|                 | 4                            | 5.8782         |        | 0.3026     |         | 0.0951    |        | 5.8790    |        |
|                 | 6                            | 3.9274         |        | 0.2890     |         | 0.0908    |        | 3.9284    |        |
|                 | 10                           | 2.3335         |        | 0.2747     |         | 0.0863    |        | 2.3351    |        |
|                 | 16                           | 1.4665         |        | 0.2614     |         | 0.0821    |        | 1.4688    |        |
|                 | 25                           | 0.9272         |        | 0.2637     |         | 0.0829    |        | 0.9309    |        |
|                 | 35                           | 0.6685         |        | 0.2567     |         | 0.0807    |        | 0.6733    |        |
|                 | 50                           | 0.4939         |        | 0.2435     |         | 0.0765    |        | 0.4998    |        |
|                 | 70                           | 0.3424         |        | 0.2395     |         | 0.0752    |        | 0.3506    |        |
|                 | 95                           | 0.2471         |        | 0.2331     |         | 0.0732    |        | 0.2577    |        |
|                 | 120                          | 0.1964         |        | 0.2289     |         | 0.0719    |        | 0.2091    |        |
|                 | 150                          | 0.1597         |        | 0.2302     |         | 0.0723    |        | 0.1753    |        |
|                 | 185                          | 0.1283         |        | 0.2326     |         | 0.0731    |        | 0.1476    |        |
|                 | 240                          | 0.0987         |        | 0.2281     |         | 0.0717    |        | 0.1219    |        |
|                 | 300                          | 0.0798         |        | 0.2260     |         | 0.0710    |        | 0.1068    |        |
|                 | 400                          | 0.0639         |        | 0.2259     |         | 0.0710    |        | 0.0955    |        |

## 0.6/1 kV 90°C CROSS-LINKED POLYETHYLENE INSULATED PVC SHEATHED STEEL TAPE ARMOUR FLAME RETARDANT POWER CABLE

IEC 60502-1

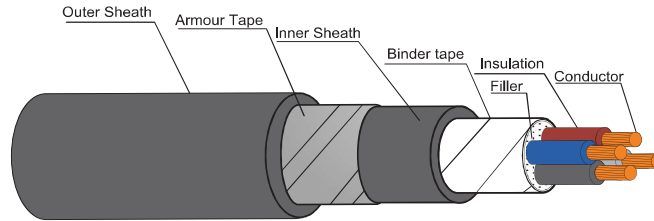

## CABLE STRUCTURE

**Conductor** : Non-compacted and compacted round annealed copper  
: Multi-core : Sizes 1.5 mm<sup>2</sup> up to 400 mm<sup>2</sup>

**Insulation** : Cross-Linked polyethylene (XLPE)

**Core identification** : 4 Cores: Blue, Brown, Black, Grey

**Inner Sheath**: Black polyvinyl chloride (PVC)

**Armour** : Two galvanized flat steel tape

**Sheath** : Black flame retardant polyvinyl chloride (PVC/ST2)

## TECHNICAL DATA

**Classification** : Maximum conductor temperature 90°C  
: Circuit voltage not exceeding 1,200 Volts

**Rated voltage** : 600 Volts between Line to Earth  
: 1,000 Volts between Line to Line

**Testing volt** : 3,500 Volts

**Reference standard** : IEC 60502-1, IEC 60228, IEC 60332-1  
: IEC 60332-3-24 ( Cat.C )

## APPLICATION

For installation exposed, or in raceway, wet or dry location, or direct burial in ground

| Number of cores | Nominal cross sectional area (mm <sup>2</sup> ) | Conductor type | Insulation thickness nominal (mm) | Inner Sheath thickness approx. (mm) | Dia. Of inner sheath approx. (mm) | Armor thickness nominal (mm) | Sheath thickness nominal (mm) | Overall diameter approx. (mm) | Conductor resistance at 20°C maximum (Ω/km) | Insulation resistance at 20°C minimum (MΩ-km) | Continuous current rating in free air at 40°C maximum (A) | Continuous current rating in ground at 30°C maximum (A) | Cable weight approx. (kg/km) | Standard Length (m) |
|-----------------|-------------------------------------------------|----------------|-----------------------------------|-------------------------------------|-----------------------------------|------------------------------|-------------------------------|-------------------------------|---------------------------------------------|-----------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------|------------------------------|---------------------|
| 4               | 1.5                                             | Non-Compacted  | 0.7                               | 1.2                                 | 11.0                              | 0.2                          | 1.8                           | 16.0                          | 12.1                                        | 2,500                                         | 24                                                        | 28                                                      | 410                          | 500/D               |
|                 | 2.5                                             | Non-Compacted  | 0.7                               | 1.2                                 | 12.0                              | 0.2                          | 1.8                           | 17.5                          | 7.41                                        | 2,100                                         | 31                                                        | 37                                                      | 480                          | 500/D               |
|                 | 4                                               | Non-Compacted  | 0.7                               | 1.2                                 | 13.5                              | 0.2                          | 1.8                           | 18.5                          | 4.61                                        | 1,700                                         | 41                                                        | 48                                                      | 550                          | 500/D               |
|                 | 6                                               | Non-Compacted  | 0.7                               | 1.2                                 | 15.0                              | 0.2                          | 1.8                           | 20                            | 3.08                                        | 1,450                                         | 52                                                        | 59                                                      | 700                          | 500/D               |
|                 | 10                                              | Compacted      | 0.7                               | 1.2                                 | 16.0                              | 0.2                          | 1.8                           | 22                            | 1.83                                        | 1,250                                         | 69                                                        | 78                                                      | 850                          | 500/D               |
|                 | 16                                              | Compacted      | 0.7                               | 1.2                                 | 18.5                              | 0.2                          | 1.8                           | 23                            | 1.150                                       | 1,000                                         | 91                                                        | 101                                                     | 1200                         | 500/D               |
|                 | 25                                              | Compacted      | 0.9                               | 1.2                                 | 22                                | 0.2                          | 1.8                           | 28                            | 0.727                                       | 1,050                                         | 122                                                       | 130                                                     | 1700                         | 500/D               |
|                 | 35                                              | Compacted      | 0.9                               | 1.2                                 | 25                                | 0.2                          | 1.9                           | 30                            | 0.524                                       | 900                                           | 149                                                       | 156                                                     | 2100                         | 500/D               |
|                 | 50                                              | Compacted      | 1.0                               | 1.2                                 | 28                                | 0.2                          | 2.1                           | 34                            | 0.387                                       | 850                                           | 181                                                       | 185                                                     | 2700                         | 500/D               |
|                 | 70                                              | Compacted      | 1.1                               | 1.2                                 | 33                                | 0.5                          | 2.2                           | 40                            | 0.268                                       | 800                                           | 227                                                       | 226                                                     | 3900                         | 500/D               |
|                 | 95                                              | Compacted      | 1.1                               | 1.2                                 | 37                                | 0.5                          | 2.4                           | 45                            | 0.193                                       | 650                                           | 281                                                       | 272                                                     | 5000                         | 500/D               |
|                 | 120                                             | Compacted      | 1.2                               | 1.3                                 | 42                                | 0.5                          | 2.5                           | 49                            | 0.153                                       | 650                                           | 325                                                       | 309                                                     | 6500                         | 500/D               |
|                 | 150                                             | Compacted      | 1.4                               | 1.4                                 | 46                                | 0.5                          | 2.7                           | 54                            | 0.124                                       | 700                                           | 370                                                       | 345                                                     | 7500                         | 500/D               |
|                 | 185                                             | Compacted      | 1.6                               | 1.5                                 | 52                                | 0.5                          | 2.9                           | 61                            | 0.0991                                      | 700                                           | 426                                                       | 389                                                     | 9500                         | 500/D               |
|                 | 240                                             | Compacted      | 1.7                               | 1.6                                 | 59                                | 0.5                          | 3.1                           | 68                            | 0.0754                                      | 650                                           | 504                                                       | 449                                                     | 12000                        | 500/D               |
|                 | 300                                             | Compacted      | 1.8                               | 1.7                                 | 65                                | 0.5                          | 3.4                           | 74                            | 0.0601                                      | 600                                           | 576                                                       | 504                                                     | 14500                        | 500/D               |
|                 | 400                                             | Compacted      | 2.0                               | 1.9                                 | 73                                | 0.5                          | 3.6                           | 83                            | 0.0470                                      | 600                                           | 662                                                       | 567                                                     | 18500                        | 500/D               |

Remark : Thermal resistivity of soil 1.2 K.m/W or °C.m/W

D : Packing in drum

Deep of laying (For cable laid direct in ground) 0.8 m

| Number of cores | Nominal cross sectional area (mm <sup>2</sup> ) | A.C. Resistance R (Ω/km) | Inductance L (mH/km) | Reactance XL (Ω/km) | Impedance Z (Ω/km) |
|-----------------|-------------------------------------------------|--------------------------|----------------------|---------------------|--------------------|
| 4               | 1.5                                             | 15.4287                  | 0.3427               | 0.1077              | 15.4291            |
|                 | 2.5                                             | 9.4485                   | 0.3249               | 0.1021              | 9.4491             |
|                 | 4                                               | 5.8782                   | 0.3026               | 0.0951              | 5.8790             |
|                 | 6                                               | 3.9274                   | 0.2890               | 0.0908              | 3.9284             |
|                 | 10                                              | 2.3335                   | 0.2747               | 0.0863              | 2.3351             |
|                 | 16                                              | 1.4665                   | 0.2614               | 0.0821              | 1.4688             |
|                 | 25                                              | 0.9272                   | 0.2637               | 0.0829              | 0.9309             |
|                 | 35                                              | 0.6685                   | 0.2567               | 0.0807              | 0.6733             |
|                 | 50                                              | 0.4939                   | 0.2435               | 0.0765              | 0.4998             |
|                 | 70                                              | 0.3424                   | 0.2395               | 0.0752              | 0.3506             |
|                 | 95                                              | 0.2471                   | 0.2331               | 0.0732              | 0.2577             |
|                 | 120                                             | 0.1964                   | 0.2289               | 0.0719              | 0.2091             |
|                 | 150                                             | 0.1597                   | 0.2302               | 0.0723              | 0.1753             |
|                 | 185                                             | 0.1283                   | 0.2326               | 0.0731              | 0.1476             |
|                 | 240                                             | 0.0987                   | 0.2281               | 0.0717              | 0.1219             |
|                 | 300                                             | 0.0798                   | 0.2260               | 0.0710              | 0.1068             |
|                 | 400                                             | 0.0639                   | 0.2259               | 0.0710              | 0.0955             |